



FL2933D4U21-4G

Foxline FL2933D4U21-4G is an 4GB memory module, based on eight 512Mx8-bit FBGA components. The SPD is programmed to JEDEC standard latency DDR4-2933 timing of 21-21-21 at 1.2V. Each 288-pin DIMM uses gold contact fingers. 100% tested and backed by limited lifetime warranty. RoHS Compliant and Halogen-Free.


SPECIFICATIONS

Part Number	FL2933D4U21-4G
Description	DIMM 4GB 2933 DDR4 CL 21 (512M*8)
Form Factor	288-pin DIMM
Capacity	4GB
Technology	DDR4 SDRAM
Voltage	1.2V
Speed	2933MHz PC4-23466
CAS Latency	CL21
Organization	512Mx64
Components Layout	(512Mx8) x8
Rank	1Rx8
DIMM Type	Unbuffered
ECC	Non-ECC
Warranty	Limited lifetime
Operative Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C




COMPONENTS LAYOUT:

Front

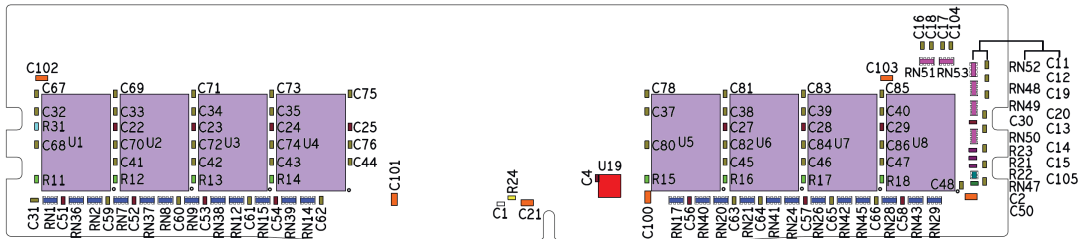

Back

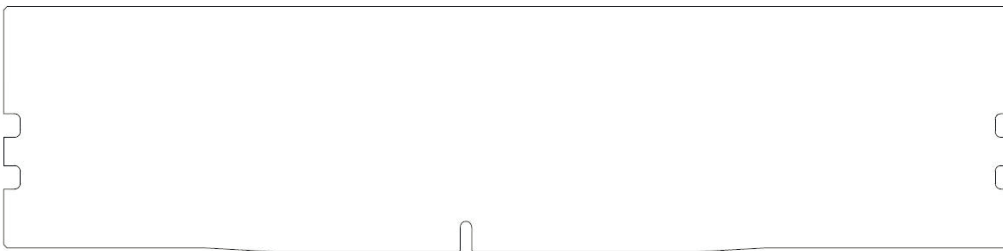

MODULE DIMENSIONS:

